## **Sound Strobe Siren**

## **SPECIFICATIONS**


Working voltage: 12VDC-24VDC. Alarm Current:  $\leq 50$ mA. Ambient temperature:  $-10^{\circ}$ C~+55°C. Ambient humidity:  $\leq 95\%$ RH. Sound level of alarm:  $\geq 100$ dB. Flash Intensity:  $\geq 75$ CD Flash Period: <1S

Life of flash light: >40000times


Dimensions:  $133\text{mm} \times 115\text{mm} \times 50\text{mm}$ 

 $L \times W \times D(With base)$ 

Weight: 141g



## **INSTALLATION & WIRING**

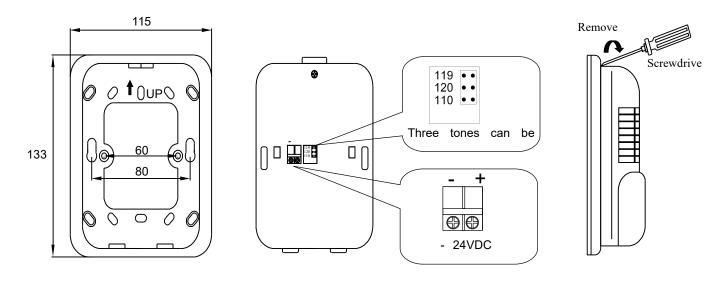

## **INSTALLATION**

**NOTE**: All wiring must conform to applicable local codes, ordinances, and regulations.

Mounting Indoor Wall or Ceiling Products

- 1. Drill 2 screw holes apart from each other 60mm
- -80mm on the wall.
- 2. Connect field wiring to terminals
- 3. To attach product by two mounting screws.
- 4. Secure product by tightening the two mounting screws in the front of the product housing.